


Profiled access door shaped for continuous flow and noise reduction

\*Available in grey, black and white.

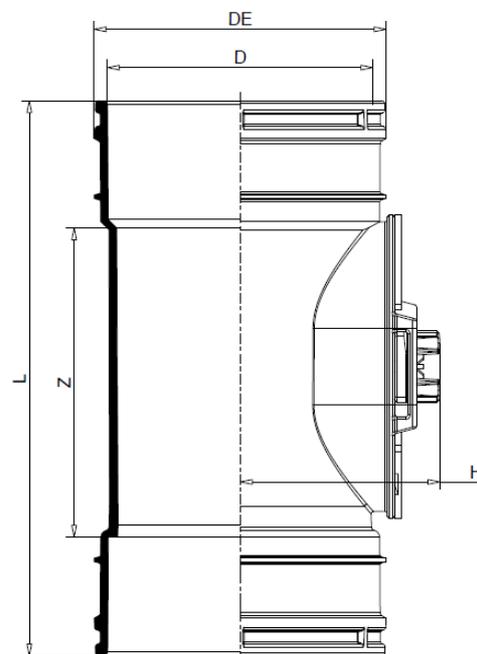

Code	D	DE	L	Z	H
138.4	110	122	234	131	84

### Features and benefits

- Kitemark approved
- Access door profile is designed to sit flush with the pipe to stop material build up and reduce the risk of blockages
- Designed to accommodate Terrain brackets for creating a fixed point
- Can be converted to a double socket push-fit fitting by solvent welding a 109.4 on each end
- Spare doors can be ordered separately using code 137.4.502
- Manufactured in PVC-U to BS EN 4514 and 1329-1
- The downstream socket is manufactured slightly tighter to ensure best solvent weld when the two surfaces mate together